

User Instructions

PopUp Display



Open the case and remove the frame and box of channel bars.



Place the frame on the ground and extend until the locking arms connect and lock into place.



The channel bars snap onto the frame in runs of 3. There will be enough bars to cover the front of the system and the two outer edges of the back.



When all channel bars are in place you can hang your panels, which could be graphic or fabric.



Each panel has a small hook on the back. This hooks over the small stud at the top of the frame.




If you have ordered a flood light. It can be found inside the lid, held into place by a cover.



The flood light slides into the 'X' of the top horizontal scissor, resting on the front tube and hooking under the rear.



If you have ordered a fabric or graphic case to counter conversion, this can be wrapped around the case. The cover that held the flood lights in place can then be used as a top cover.

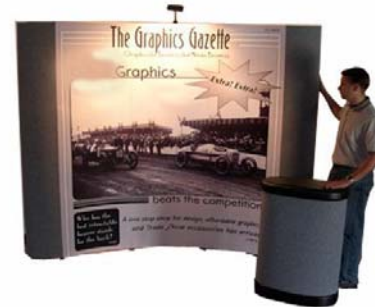

Product Details

| | |
|-----------------------------|------------------------|
| Front curved panel sizes: | 26.5" w x 87.5625" h |
| Back curved panel sizes: | 31.75" w x 87.5625" h |
| End Cap panel sizes: | 23.5" w x 87.5625" h |
| Straight panels Sizes: | 28.845" w x 87.5625" h |
| Case to counter panel size: | 67" w x 30.5" h |

Shipping size

of molded case

39" h x 26" w x 16" d

Weights may vary depending on size and content of system

Important note

When collapsing the product After use, make sure you Remove ALL channel bars And that you press the release button on the locking arms. Buckling to the frame caused by failure to do either of these may note be covered by the product warranty.



Thank you for purchasing this product, we hope you have a great presentation! Should you have any questions on its use or require further information on our other products please don't hesitate in contacting your supplier.